



INNOVATION AT WORK

GLEED

GLWP-D

Adjustable LED Wall Pack



- DLC Listed
- ETL, cETL Listed
- High Lumens 120lm/w
- IP65 Wet Location
- Wall Mounted
- Photocell Optional
- Lifespan L70>100,000 Hours
- 5 Years warranty




Repair or replace
product Freely
in warranty



Visit designlights.org
to see which models
are DLC listed




ETL for USA
cETL for CANADA

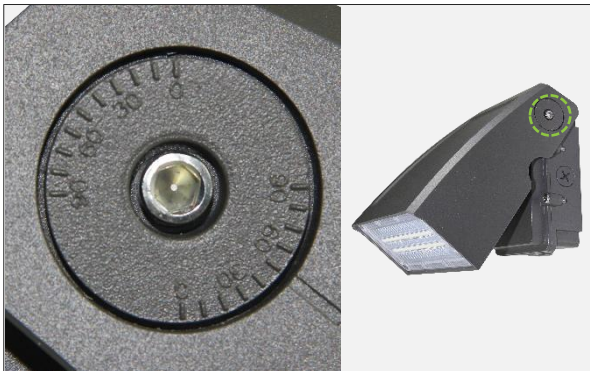

Adjustable 0-90°

"full cut-off" or "half cut-off" for your option
There are adjustment scale at the side
of lamp body for your easy adjusting

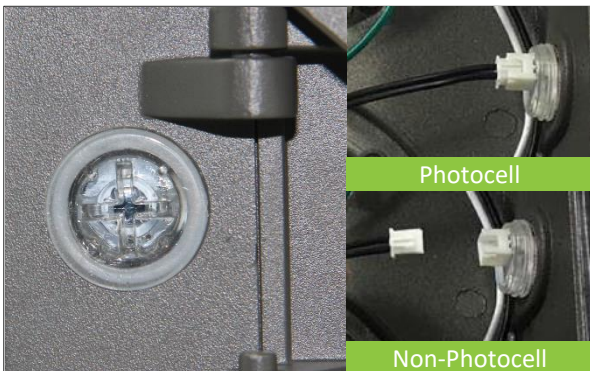

Photocell optional

Support Removable,
Connect the terminal with photocell
Remove the terminal without photocell



Multi-Volt: 100-277/347Vac

High Quality IP65 Waterproof Driver
100-277Vac or 100-277/347Vac optional



Glare-Free Lens


High efficiency Fresnel lens
luminous efficacy up to 120m/w
Glare-Free to protect people eyes
UV-Resistant, No yellowish worry

Parameter

Model No.	GLWP-20D	GLWP-30D	GLWP-40D	GLWP-60D	GLWP-80D	GLWP-100D	GLWP-120D
Wattage	20W	30W	40W	60W	80W	100W	100W
Luminous Efficacy	120lm/w	120lm/w	120lm/w	120lm/w	120lm/w	120lm/w	120lm/w
Lumens output	2400lm	3600lm	4800lm	7200lm	9600lm	12000lm	14400lm
HID/MF Equivalent	100W	150W	200W	250W	350W	400W	500W
Fixture Weight	1.36kg(3lbs)		2.22kg(4.9lbs)		3.0kg(6.6lbs)		
LEDs Brand	(Philips) Lumileds SMD 3030						
CCT	3000K, 4000K, 5000K,5700K						
CRI	70+ or 80+						
Beam Angle	100°						
Input Voltage	100-277Vac or 100-347V 50/60Hz						
Function	Photocell, Motion Sensor optional						
Power Factor	>0.9						
IP Rating	IP65 /Wet Location						
Working Temp.	-30° C ~ 50° C (-22° F~122° F)						
Storage Temp.	-40° C ~ 70° C (-40° F~158° F)						
Finish	Brown						
Housing	Die-casting Aluminum						
Diffuser	Plastic						
Installation	Surface mounted						
Lifespan(L70)	>100,000 Hours						
Certification	ETL, cETL, DLC						

Dimension

Unit: mm(inch)

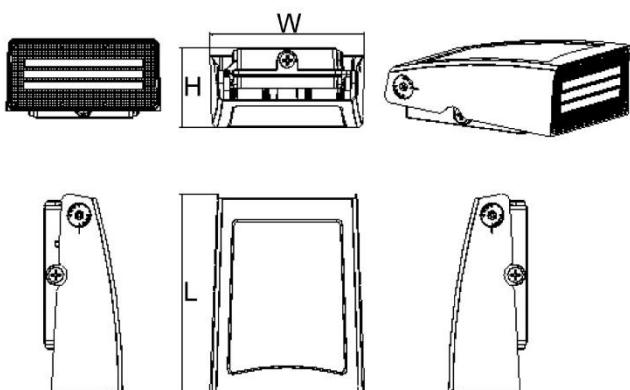

Power	L mm(inch)	W mm(inch)	H mm(inch)
20W 30W 40W	205.25 [8,08in]	164.95 [6,49in]	97.65 [3,84in]
60W 80W	280.57 [11,05in]	215.96 [8,5in]	110.15 [4,34in]
100W 120W	330.55 [13,01in]	268.97 [10,59in]	124.15 [4,89in]

Order Information

Sample: GLWP-60D-50

	-XX	(X)
Product Family	CCT	Function
GLWP-20D = 20W GLWP-30D = 30W GLWP-40D = 40W GLWP-60D = 60W GLWP-80D = 80W GLWP-100D = 100W GLWP-120D = 120W	30 = 3000K 40 = 5000K 50 = 5000K 57 = 5700K	Blank= Non-dimming (P) = Photocell
In Standard	Options (add as Suffix)	
Brown Finish 100-277Vac 120lm/w CRI>70	347 = 100-277/347Vac Other customized	

Package Information

ITEM	QTY/CTN	G. W.	CTN SIZE	CBM
GLWP-20D	6pcs	10kg(2.2lb)	42x40x26cm (16.5"x15.8"x10.2")	0.044
GLWP-30D	6pcs	10kg(2.2lb)	42x40x26cm (16.5"x15.8"x10.2")	0.044
GLWP-40D	6pcs	10kg(2.2lb)	42x40x26cm (16.5"x15.8"x10.2")	0.044
GLWP-60D	6pcs	15kg(33lb)	50.5x36x56.5cm (19.9"x14.2"x22.3")	0.103
GLWP-80D	6pcs	15kg(33lb)	50.5x36x56.5cm (19.9"x14.2"x22.3")	0.103
GLWP-100D	4pcs	14.9kg(32.8lb)	40x39.5x64.5cm (15.8"x15.6"x25.4")	0.102
GLWP-120D	4pcs	14.9kg(32.8 lb)	40x39.5x64.5cm (15.8"x15.6"x25.4")	0.102

Container Loading QTY

ITEM	20GP	40GP	40HQ
GLWP-20D/30D/40D	3800	7900	8800
GLWP-60D/80D	2100	4400	5000
GLWP-100D/120D	1300	2700	3000