

GLBN-58A-XX

LED Barn Light 58W 6400lm



Features


- Integrated die-casting forming, with effective heat dissipation.
- IP65 for Wet location.
- Photocell
- ETL, DLC List.
- 5 Years warranty

Parameter

Model No.:	GLBN-58A
Power Consumption:	58W
Input Voltage:	100-277Vac 50/60Hz
LED Type	Philips SMD3030
Lumens Output:	6400lm
CRI	70+
Color Temperature:	3000K, 4000K, 5000K, 5700K
Beam Angle:	120°
Power Factor:	>0.90
IP Rating	IP65 / Wet location
Working Temp.:	-20° C ~ 50° C
Storage Temp.:	-40° C ~ 70° C
Finish:	Brown
Housing	Aluminum+PC cover
IK Rating	IK07
Installation	Wall mounting, Arm Mounting
Fixture Weight:	1.2kg(2.64lb)
Certification:	ETL, DLC
Warranty:	5 years




Photometric

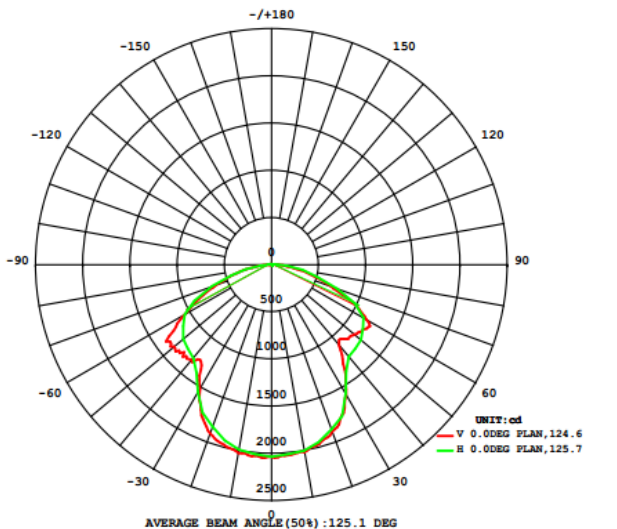

Lux Charts

	Evag,Emax	Diameter
2m	102lx, 511lx	761cm
3m	45lx, 227lx	1142cm
4m	26lx, 128lx	1522cm
5m	16lx, 82lx	1903cm

Dimension and Picture

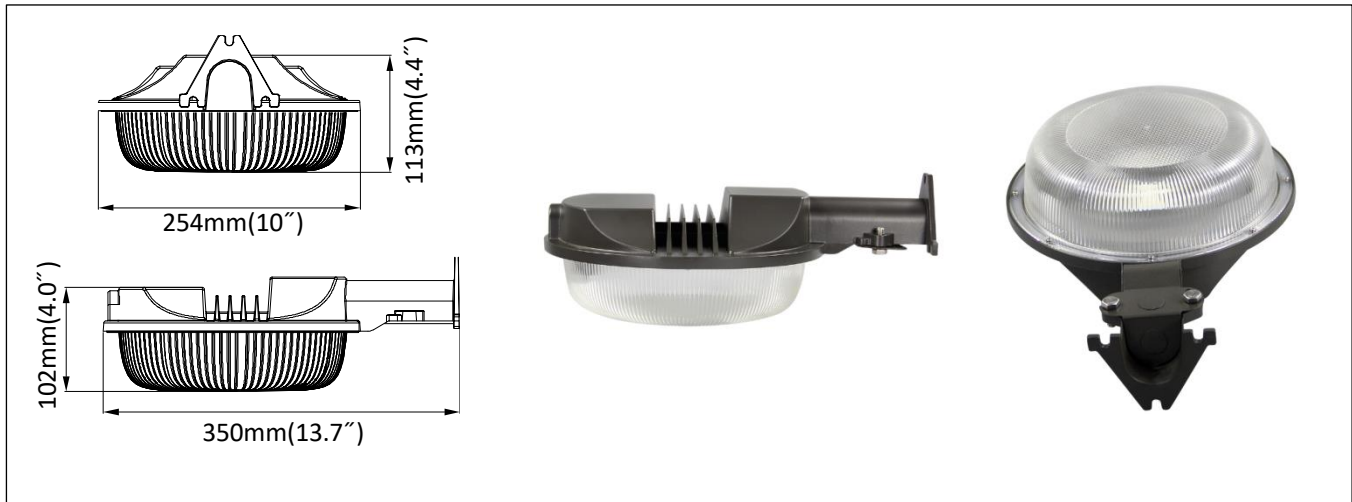

Ordering Information

Model No.	Power	Voltage	Finish	CCT	Lumens	Photocell
GLBN-58A-40	58W	100-277Vac	Brown	4000K	4600lm	/
GLBN-58A-50	58W	100-277Vac	Brown	5000K	4600lm	/
GLBN-58A-40(PC)	58W	100-277Vac	Brown	4000K	4600lm	Yes
GLBN-58A-50(PC)	58W	100-277Vac	Brown	5000K	4600lm	Yes
GLBN-58A-40(Bracket)	58W	100-277Vac	Brown	4000K	4600lm	/
GLBN-58A-50(Bracket)	58W	100-277Vac	Brown	5000K	4600lm	/
GLBN-58A-40(Bracket)(PC)	58W	100-277Vac	Brown	4000K	4600lm	Yes
GLBN-58A-50(Bracket)(PC)	58W	100-277Vac	Brown	5000K	4600lm	Yes

- Finish: Brown (other Finish, please call us for quotation)
- Other color temperature 3000K-5700K Optional, please call us for checking lead time.

Packaging

Item	Q'ty/CTN	G. W.	CTN Size
GLBN-58A	4pcs	8.2kg(18lb)	58x39x33cm
GLBN-58A(Bracket)	4pcs	12.1kg(26.6lb)	73x49x33cm

Container Loading QTY

Item	20'GP	40'GP	40'HQ
GLBN-58A	1496pcs	3096pcs	3628pcs
GLBN-58A (Bracket)	952pcs	1968pcs	2308pcs

