
GLOBAL LIGHTING AND ELECTRICAL DESIGN



4" Round Led Slim Panel Light

Model No.: SSL-4-3K / SSL-4-4K / SSL-4-5K

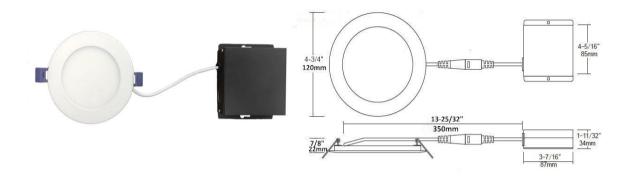

SPECIFICATION:

-Input Voltage: AC 120V

-Wattage: 9W

-Lumens: 750lm

-CCT: 3000K / 4000K / 5000K

-CRI: Ra>80

-Power Frequency: 50~60HZ

-Beam Angle: 120°

—Operating Temperature: -20 °C ~40 °C

—Dimmable: Yes (Triac)

-Harmonic Distortion: <2%

-Lifespan / Warranty: 50,000hrs / 5 years

-Lens: PMMA

-Certification: cETLus & Energy star

- Durable airtight die-cast aluminum body, Aluminum Junction Box

—IP Rating: IP35





















LUMINAIRE PHOTOMETRIC

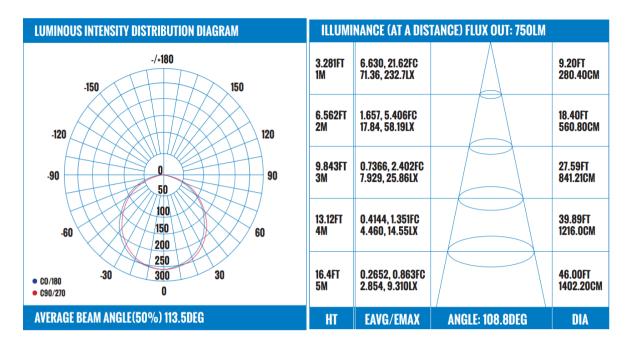

INSTALLATION

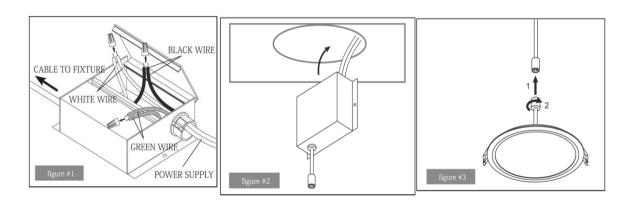

ACCESSORIES:



A-SMP4

4¼ " Round premounting plate for led slim panel light



A-EC72

Extension Cord for led slim panle light 72"=6FT



A-NCMP4

41/4 " New ConstructionRound pre-mounting plate for led slim panel light



A-EC120

Extension Cord for led slim panle light 120"=10FT