

**NAME:** LED Corn Light

## TECHNICAL DATA SHEET

**P/N:** SNC-CLW-60WB1E39

### Advantage

- UL, CUL, DLC certificate
- E39 lamp base
- 360 degree lighting, high CRI.
- IP64 Waterproof Rating
- Big heat sink, one SUNON fan.
- Internal driver, input voltage AC100-277V.
- New style and high efficient wide-range input.
- Long lifespan and good heat dissipation.
- Direct replacement for Metal Halide, Easy Installation.
- Fits many different fixtures to replace traditional lamps.

### Application

Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B).

---



# TECHNICAL DATA SHEET

PRODUCT SPECIFICATIONS	
Product name	LED Corn Light
Light Type	Corn Light
Part No	SNC-CLW-60WB1E39
Dimension	Φ93*285 MM
Technical Characteristic	
Cover	Clear
Color temperature	4000K、4500K、5000K、5700K
CRI	> 80
Lumen-In Luminaires	6200-6600 LM
Lumen Efficacy-In Luminaires	105-110 LM/W
Input Power	60 W
Viewing Angle	360 degree
Input Voltage	AC100-277V 50/60Hz
PFC	>0.9
Equivalent	120W CFL , 175W MHL/HPS/HID
Waterproof Rating	IP64
MATERIALS	
LED Type	SMD2835
LED QTY	416 PCS
Housing	PC+AL (Fin)
Housing color	White+Grey
OTHERS	
Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-70% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-75% RH
Application	Indoor/Outdoor
Safety Certification	UL、CUL、DLC
Warranty Time	5 Years

# TECHNICAL DATA SHEET


Remark: The testing data comes from the product in luminaires.

DATA OF LAMP		PHOTOMETRIC DATA <span style="float: right;">Eff: 110.90 lm/W</span>			
MODEL		I <sub>max</sub> (cd)	1349	S/MH (C0/180)	3.16
NOMINAL POWER (W)	60	LOR (%)	100.0	S/MH (C90/270)	3.01
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	6473.3	η UP, DN (C0-180)	6.7, 44.2
NOMINAL FLUX (lm)	6473.28	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.3, 42.8
LAMPS INSIDE	1	η up (%)	13.0	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120.0	η down (%)	87.0	CIBSE SHR MAX	0.00

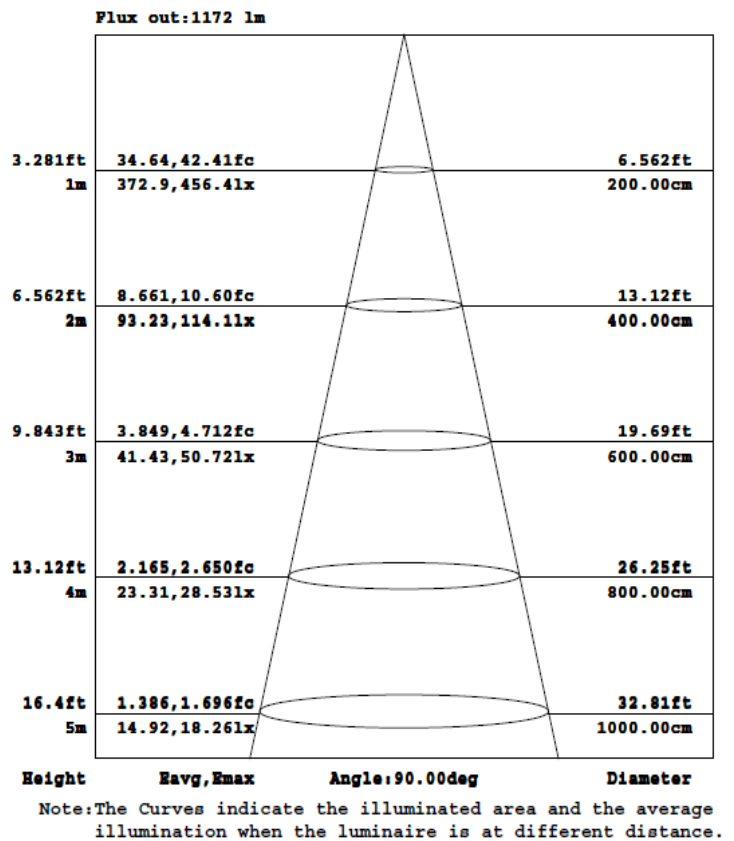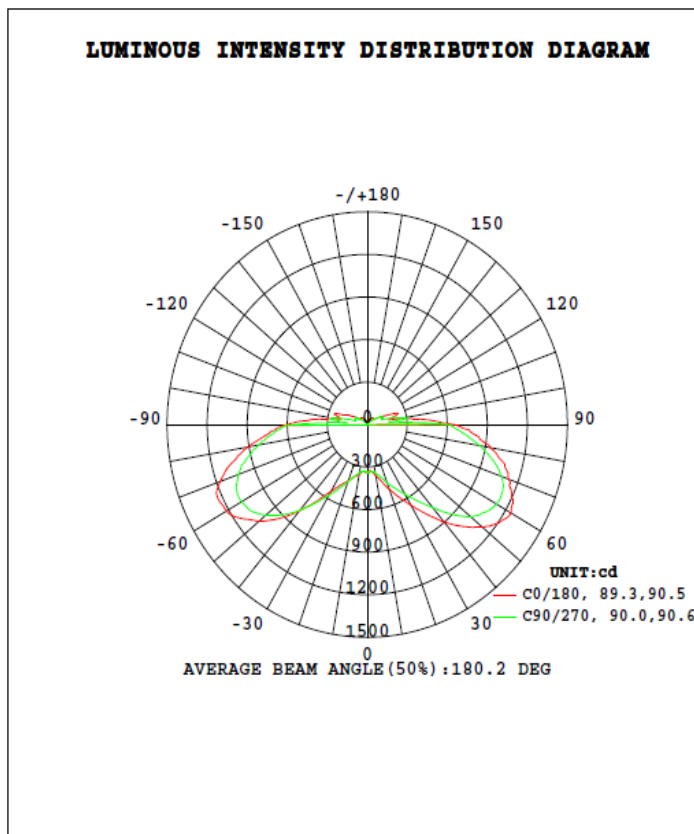

# TECHNICAL DATA SHEET


## Package

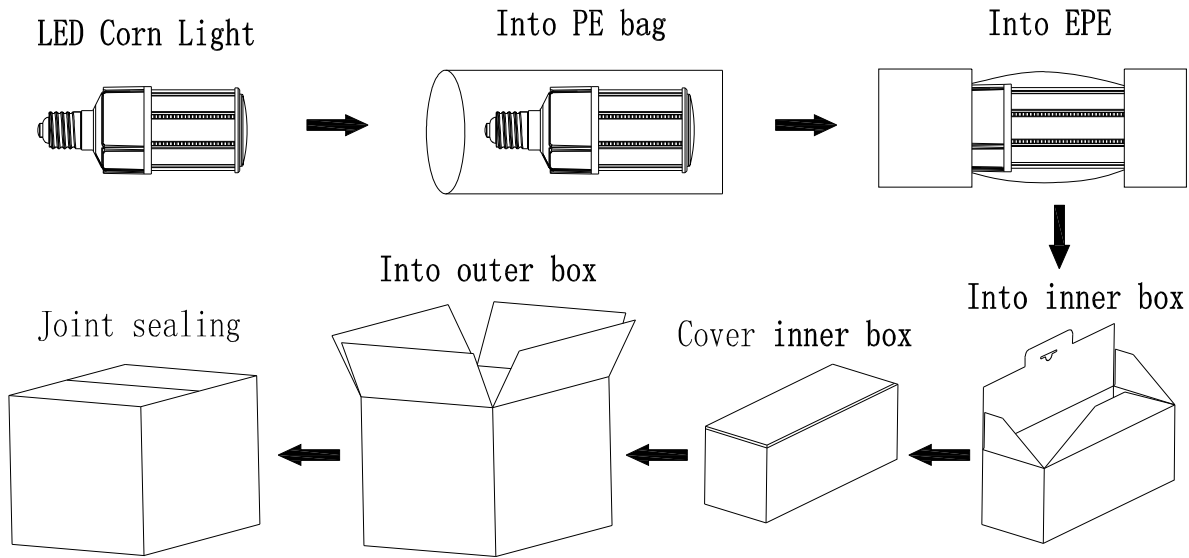

	Size	Qty/ Carton	Net Weight/ Carton	Gross Weight/ Carton
Inner box	310*120*120 MM	1 PC	0.57 KG	0.72 KG
Outer box	495*380*330 MM	12 PCS	6.9 KG	9.8 KG

## Notice For User

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- Make sure to remove or bypass the ballast in the fixtures before install the lamps.
- Suitable for damp locations. Do not use with dimmers.
- Suitable for use in enclosed luminaires, min. lamp compartment dimensions: 420\*210\*210MM.
- No-professionals, must not install and disassemble the lamps.

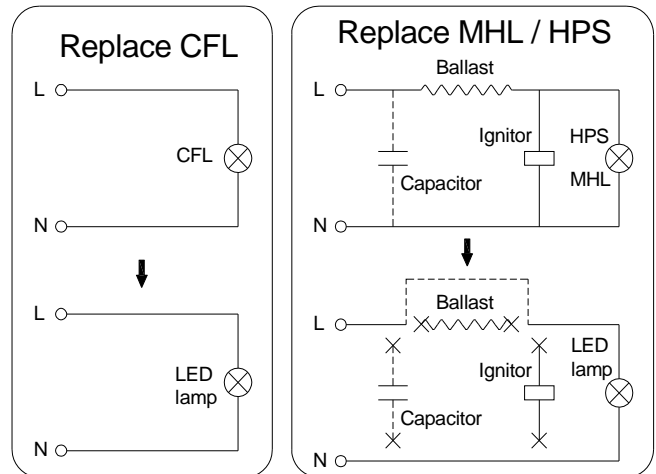

## Trouble Shootings

Troubles	Check points
Flickering of the lamps	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection