

# EL-7007RX\*

## LED Emergency Exit Sign




FEATURES	
Power (W)	2 W
Lamp Type	Straw LED
Input Voltage	120/277 VAC
Frequency	60 Hz
LED Type	Straw LED
Battery Type	Ni-cd
Working Time	90 Minutes
Charging Time	15-24 Hours



### DESCRIPTION

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall, side and ceiling mounting
- Input Voltage: 120/277VAC 60Hz
- Super bright SMD LED
- Nickel Cadmium Battery
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥90 minutes
- Conversion time: <0.2 second
- IP Class: IP20
- Operating Temperature: 0 °C ~ 40 °C

### TECHNICAL DRAWING

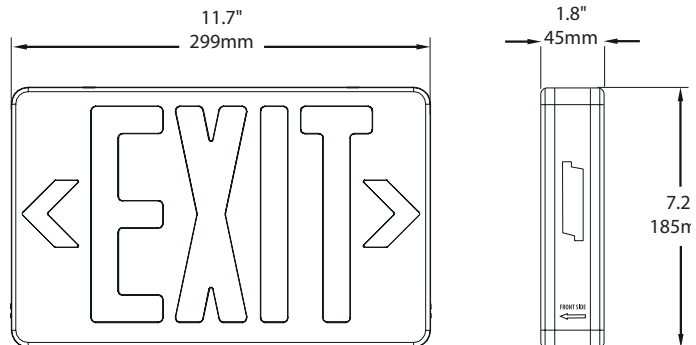

### INCLUDED PICTOGRAMS

**\*Available in:**

- Spanish (EL-7007RS)
- Green (EL-7007GX)

