


# 7050 LED Linear Light

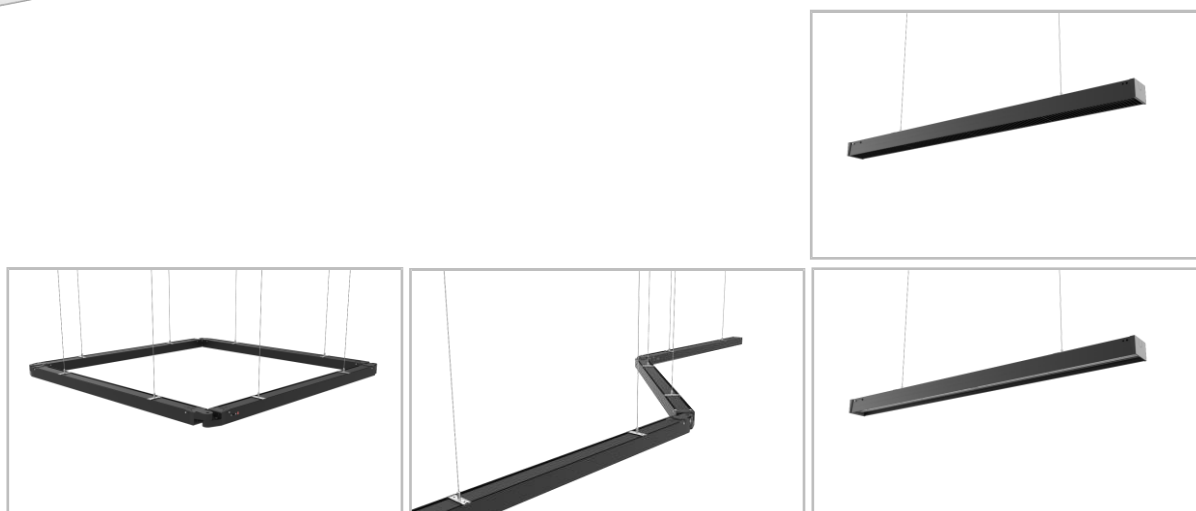

## Key Features

**Efficacy:** Up to 150Lm/W

**SDCM:** <5

**Beam Angle:** 30°/90°/60°/110°/90°/110°/120°/120°/P18°/LR40°/PC Cover120°


**Installation:** Ceiling and Suspending

**Certifications:** CE , CB, SAA, RoHS

**Warranty:** 5 years


## Application

Application: Office, Meeting room, Hotel, Hospital, Supermarkets, Shopping mall, Large retailers Library, School, Manufacture, Warehouses, Exhibition centers, Toll stations, Gymnasium etc.

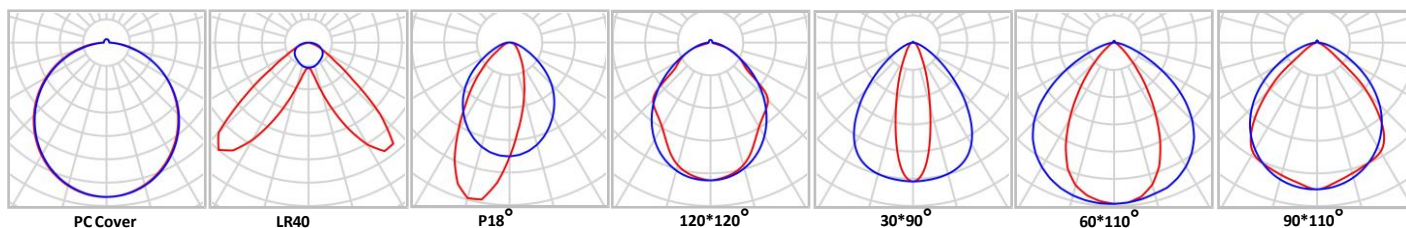


# 7050 LED Linear Light


Diffuser

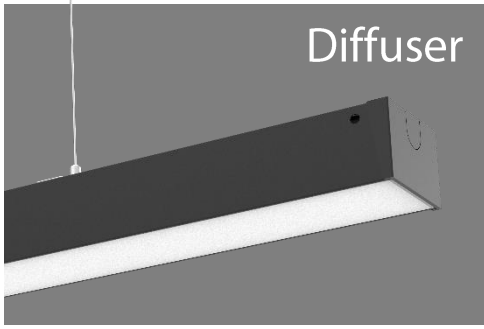

Lens

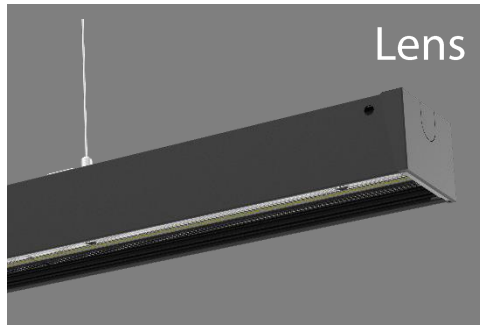


Louver

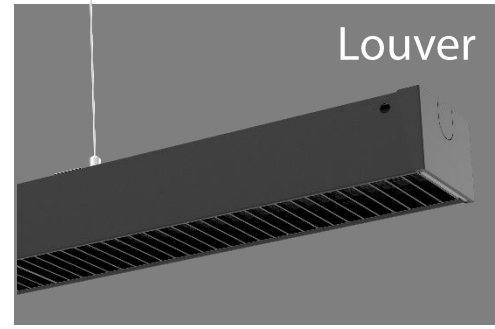

## Easy to Link


### Straight Pattern

Linkable Kits be built-in at back of lamp

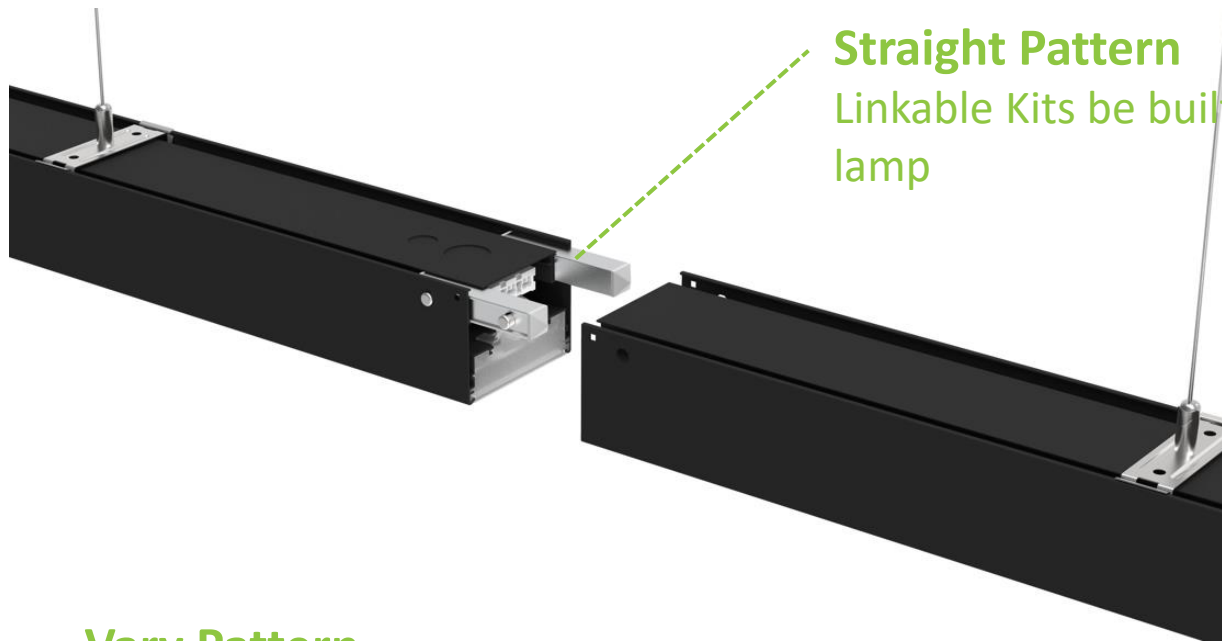

### Vary Pattern

Rotatable Linkable kits

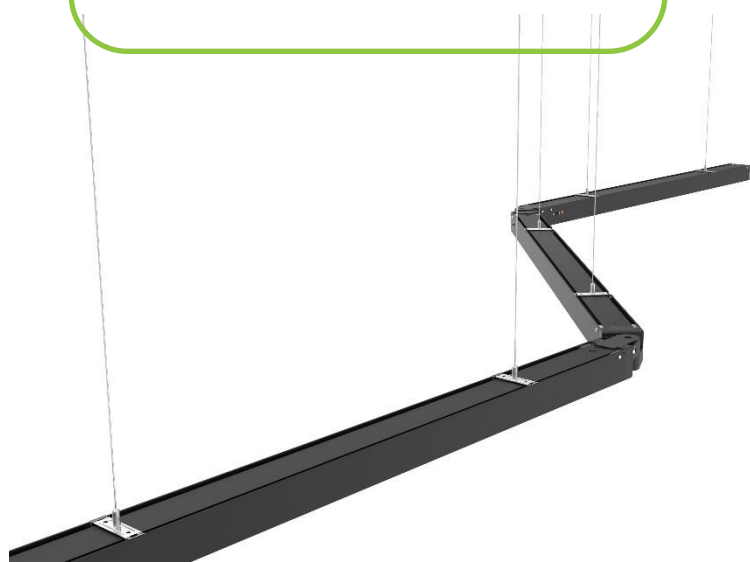

# 7050 LED Linear Light

## Product Data

Model	CGT-7050-20W	CGT-7050-40W	CGT-7050-60W	CGT-7050-75W
Wattage	20W	40W	60W	75W
Lumen	2600Lm	5200Lm	7800Lm	9000Lm
LED QTY (pcs)	144	288	432	576
Light Source	SMD2835			
Luminous Efficacy	130Lm/W			
CCT	2700K/3000K/4000K/5000K/5700K/6500K			
CRI	>80(Ra≥90 optional)			
Input Voltage	200-240Vac			
Housing Material	Aluminum,PC			
Operating temperature	-25°C to +45°C			
Operating humidity	10% to 90% RH			
Lifespan	>50000hours			

## ERP Technical Specification

Item	Specification/Data
Efficiency In	>90%
Power Factor	>0.90
Energy Efficiency Class (EU 2019/2015)	E
SDCM	<6
Starting Time	<0.5s
Life time	L80B20@50000hours


# 7050 LED Linear Light

Dimension (unit: mm)




	A(mm)	B(mm)	C(mm)
CGT-7050-20W	586	70	52
CGT-7050-40W	1158	70	52
CGT-7050-60W	1444	70	52
CGT-7050-72W	1444	70	52

## Installations

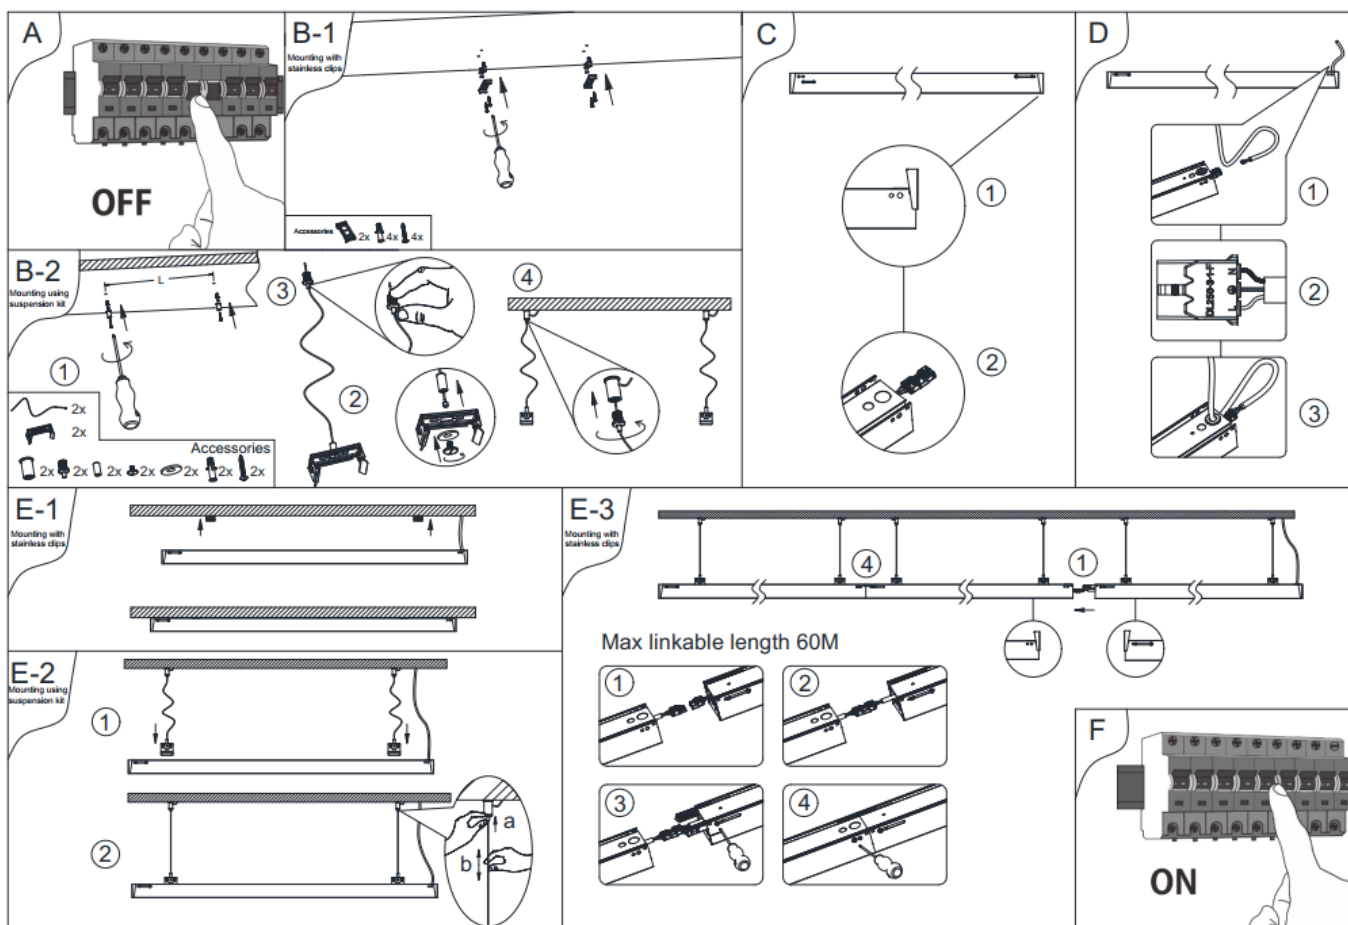

# 7050 LED Linear Light

## Packging

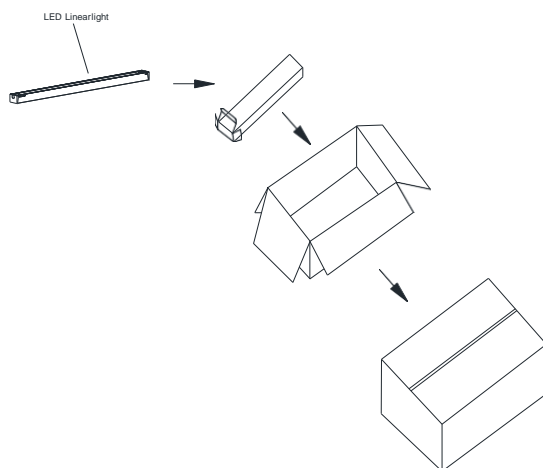

## Packing Data

Model No	Pcs/CTN	N.W./Pcs(kg)	G.W./CTN (kg)	Product Size (mm)	Carton Size(mm)
CGT-7050-20W	12	0.87	11.44	586*70*52	690*260*255
CGT-7050-40W	12	1.45	18.6	1158*70*52	1260*260*255
CGT-7050-60W	12	1.76	22.6	1444*70*52	1550*260*255
CGT-7050-75W	12	1.9	24.3	1444*70*52	1550*260*255

## Application

