

EL-7006-RC*

Emergency Light Remote Capable





| FEATURES | |
|---------------|------------------|
| Power (W) | 4 W |
| Lamp Type | 2x2 W LED |
| Input Voltage | 120/347 VAC |
| Frequency | 60 Hz |
| LED Type | SMD LED |
| Battery Type | Sealed Lead Acid |
| Working Time | 30 Minutes |
| Charging Time | 15-24 Hours |



DESCRIPTION

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall mounting
- Switchable input voltage 120/347VAC with a line cord or AC plug
- 2x2W lamps for emergency mode
- Sealed Lead-acid battery 6V 5Ah
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥ 30 minutes
- Conversion time: < 0.2 second
- IP Class: IP20
- Insulation: II, Range: 80m2
- Operating Temperature: 0 °C ~ 40 °C

TECHNICAL DRAWING

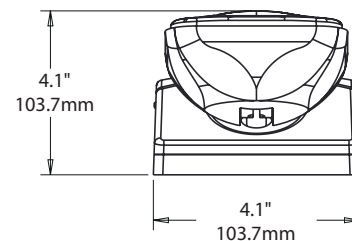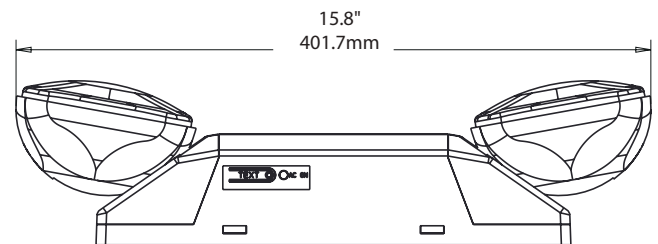

REMOTE ADD-ON SUPPORT



EL-7030A (16 pcs)



EL-7030B (8 pcs)