




GLOBAL LIGHTING AND ELECTRICAL DESIGN

Specification

(LED Wraparound)



- Integrated PC board design, higher cost performance and better heat dissipation.
- Knock out holds were designed at different location, to meet different application without affect dustproof.
- 6inch and 8inch with curved milky cover,which provides max light output and uniform illumination.
- 7inch and 11inch Unique mountain shape appearance design, stronger science and technology feeling, 180 degree shining from two sides, widely lighting area
- Easy and fast installation, Single-person mounting capability
- Available in 40W, 50W and 72W models replacing up to 300W HID.

LED Wraparound

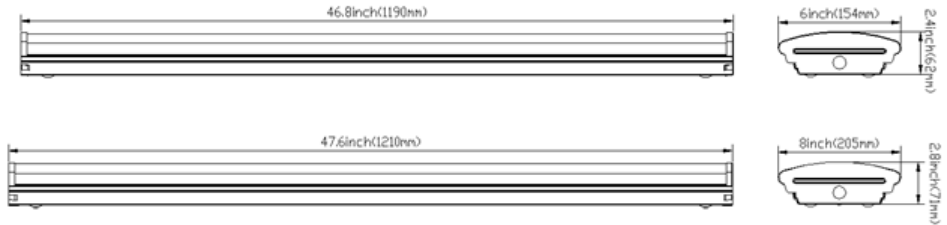

Part No.	Power	Replaces	Lumens	CCT	Material	Certificate	Input voltage
GLYRWA-40121XX-002	40W	200W HID	4650lm	3000-5000K	Fe+ Pc	DLC&ETL	120VAC
GLYRWA-50121XX-002	50W	250W HID	5535lm				50-60Hz

Photometric

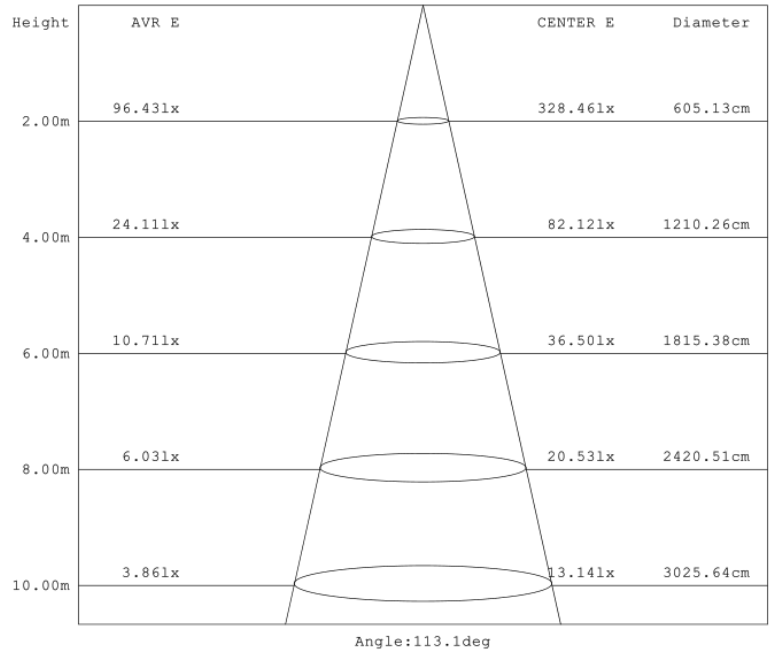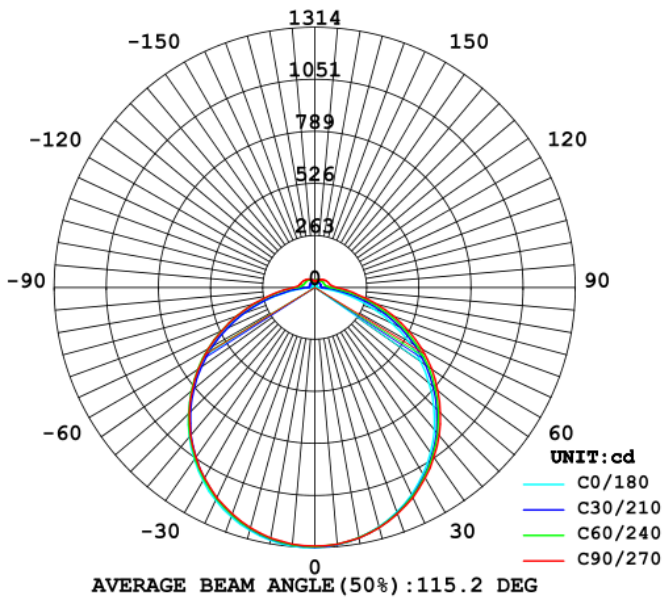

Part No.	Unit N.W. (kg)	Carton size (inch/mm)	Qty/Ctn (PCS)	G.W. (kg)
GLYRWA-40121XX-002	2 Kg	47.6* 12.2*7.8 inch (1210*310*200 mm)	4 pcs	10.3 kg
GLYRWA-50121XX-002	2.6 Kg	48.4*13.7*9.8 inch (1230*350*250 mm)	4 pcs	13.2 kg

Larger luminous surface with curved milky cover available, Please refer to page 3.

