

# WP-26A2-XX

LED Wall Pack 26W 2509lm

## Features

- DLC Listed.
- ETL cETL Listed.
- 5 Years Warranty

## Parameter

Model No.:	WP-26A2-XX
Power Consumption:	26W
Input Voltage:	100-277Vac 50/60Hz
LED Type	SMD3030
Lumens Output:	2509lm
CRI	80+
Color Temperature:	3000K, 4000K, 5000K, 5700K
Beam Angle:	100°
Power Factor:	>0.90
IP Rating	IP65 / Wet location
Working Temp.:	-20° C ~ 50° C
Storage Temp.:	-40° C ~ 70° C
Finish:	Brown
Housing:	Die-casting Aluminum
Diffuser:	Plastic
Installation:	Surface mounted with J-BOX
Fixture Weight:	1.2kg(2.64lb)
Lifespan(L70):	>80,000 Hours



### AVAILABLE OPTIONAL




Photocell



Shorting cover



## Photometric

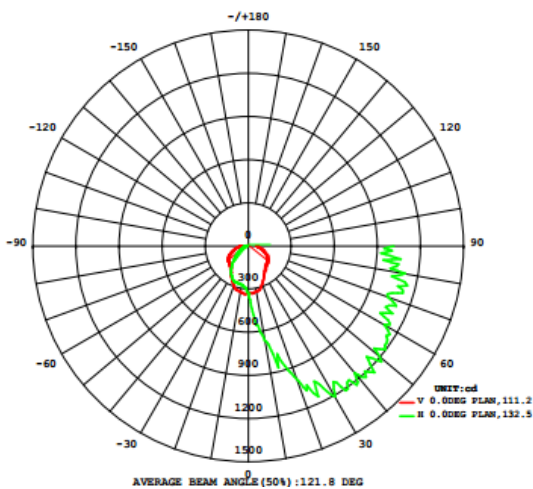

## Lux Charts

	Evag, Emax	Diameter
1m	199lx, 865lx	291cm
2m	50lx, 216lx	584cm
3m	23lx, 96lx	1168cm
4m	13lx, 54lx	1460cm

## Dimension & Picture



## Ordering Information

Model No.	Power	Voltage	CCT	Lumens	Photocell
WP-26A2-40	25.03W	100-277Vac	4000K	2509lm	\
WP-26A2-50	25.03W	100-277Vac	5000K	2509lm	\
WP-26A2-57	25.4W	100-277Vac	5700K	2710lm	\
WP-26A2-40(PC)	25.03W	100-277Vac	4000K	2509lm	Yes
WP-26A2-50(PC)	25.03W	100-277Vac	5000K	2509lm	Yes
WP-26A2-57(PC)	25.4W	100-277Vac	5700K	2710lm	Yes

- Finish: Brown(other Finish, please call us for quotation)
- Other color temperature 3000K-5700K optional, please call us for checking lead time.

## Packaging

Item	Q'ty/CTN	G. W.	CTN Size
WP-26A2-XX	10	12.2kg(26.8lb)	59x45x27cm

## Container Loading QTY

Item	20'GP	40'GP	40'HQ
WP-26A2-XX	5000	10360	12150

