




Features

Input Power on AC	4.5W
Output Power on Battery	1W
Lamp Type	SMD LED strip
Input Voltage	120-347 VAC
Frequency	50/60 Hz
Battery Type	NI-MH
Working Time	120 Minutes
Charging Time	24 Hours

Description

- Injection-molded thermoplastic ABS housing
- 2-sided sign
- Wall, side and ceiling mountable
- Input Voltage: 120 - 347VAC, 50/60Hz
- LED technology
- Nickel Metal Hydride Battery 3.6V 1500mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: 120 minutes
- Suitable for wet locations
- Operating Temperature: -20 °C ~ 40 °C / -4 °F ~ 104 °F

Technical Drawing

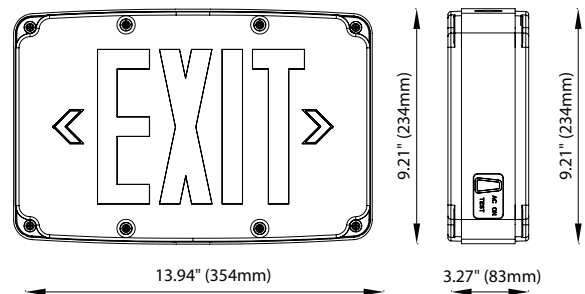

Ordering Information

Model	Description
EL-100WP	Compact LED Wet Location EXIT Sign



Canada
 25 Interchange Way Vaughan, ON L4K 5W3
 Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates Niagara Falls, NY 14305
 Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.